
# Acution Electroacustica Luba

# MONITOR 100V Line Monitor

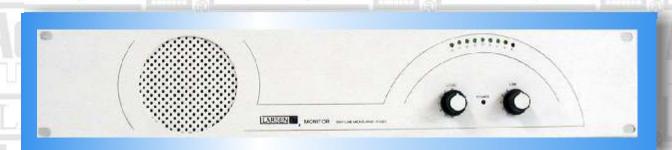

### **DESCRIPTION**

The MONITOR 100V Line Monitor/Meter is aimed at the control of 100V installations.

#### **FEATURES**

☐ 6 channels

☐ Fully RF filtered

☐ 24dB range peak meter

☐ 6dB step attenuator

☐ Active state monitored by means of LED

☐ Fully EN 55103 compliant according to 89/336/EMC

#### **SPECIFICATIONS**

Useable range 100Hz-10kHz±2dB

Speaker 4" 6W THD <0.1%

THD <0.1% Attenuator 0 to -2

enuator 0 to -24dB in 6dB steps, cuttof ysical 19", 2U

Physical 19", 21 Weight 1 Kg

Power supply 230VA @ 10VA

Operating temp. 0-40°C

Monitor V1.11 2003-11-10

Specifications may change without prior notice Copyright © by Acutron 2003 all rights reserved. Larsen® is a trademark of Acutron Electroacustica

## ABC-Abrunheira Business Center Edificios 10-11 R. das Maçarocas Abrunheira 2710-056 Sintra Tel +351 219152040 Fax +351219154079

web: www.acutron.net mail: info@autron.net

#### DISTRIBUTOR

TARSENI



